


# DUCTLESS SYSTEMS

19 SERIES MULTI-ZONE

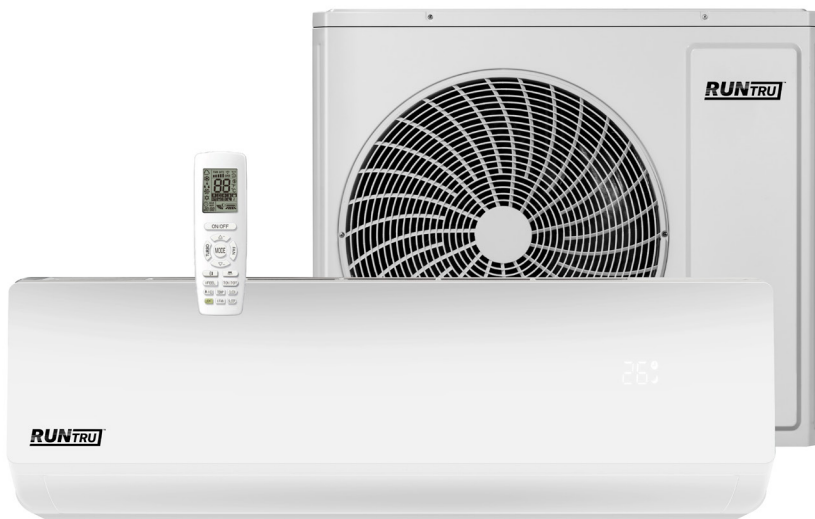

- ▶ Mix and match up to 5 indoor units to achieve 42K BTUH heating and cooling
- ▶ Low ambient heating down to -22° F
- ▶ Energy Star® certified—eligible for rebates
- ▶ Outdoor unit sound levels as low as 56 dB(A)
- ▶ Port adapters included
- ▶ 9000, 12000, 18000, & 24000 BTUH high wall mounted indoor models available
- ▶ Handheld remote controller included with each indoor unit
- ▶ Blue Fin Coastal coating

Outdoor	SEER2	HSPF2	EER2	Capacity (BTUH) Cooling	Capacity (BTUH) Heating	Voltage	Gas Line	Liquid Line	Max Overcurrent Protection	Low Ambient Heating Capability
M4THM1918A12NA	19	10	12	17000	18000	208/230	3/8"	1/4"	20	-22° - 75°F -30° - 24°C
M4THM1924A13NA	19	10	12.5	23200	24000	208/230	3/8"	1/4"	25	-22° - 75°F -30° - 24°C
M4THM1930A14NA	19	10	12.5	28400	30000	208/230	3/8"	1/4"	35	-22° - 75°F -30° - 24°C
M4THM1936A14NA	19	10	12	34000	36000	208/230	3/8"	1/4"	45	-22° - 75°F -30° - 24°C
M4THM1942A15NA	19	10	12	36000	40000	208/230	3/8"	1/4"	45	-22° - 75°F -30° - 24°C

**5 YEAR WARRANTY**

Limited functional parts warranty

**10 YEAR WARRANTY**

Functional parts warranty with product registration